

# Piezoelectric Accelerometer

## Model 6222S-20A, -50A, and -100A

- High-Temperature Operation (+260°C)
- Balanced Differential Output
- Ground-Isolated
- Requires No External Power
- Gas-Turbine Testing



Actual size

中国

北京赛斯维测控技术有限公司  
 北京市朝阳区望京西路48号  
 金隅国际C座1002  
 电话：+86 010 8477 5646  
 传真：+86 010 5894 9029  
 邮箱：[sales@sensorway.cn](mailto:sales@sensorway.cn)



**ENDEVCO**  
**MODEL**  
**6222S-20A**  
**-50A**  
**-100A**

### DESCRIPTION

The ENDEVCO® Model 6222S series of piezoelectric accelerometers is designed for vibration measurement of gas-turbine engines used in aircraft and industrial applications. The unit features high sensitivity in a low profile package with a ruggedized connector and standard ARINC 3-point mounting. The 6222S is designed for continuous operation to +500°F (260°C) with long Mean Time Between Failure (MTBF). The accelerometer is a self-generating device that requires no external power for operation.


The 6222S features ENDEVCO's PIEZITE® Type P-8 crystal element in our ISOSHEAR® construction. The result is an accelerometer with low transient-temperature and base-strain outputs, high mounted resonance, and high operating temperature. The 6222S provides a balanced differential output which is isolated from case ground. The 6222S is available in standard ranges of 20, 50 and 100 pC/g, and offers a selection of three different connector types to maximize versatility of the accelerometer. This unit is designed to utilize Endevco's 6917 series of shielded, softline cable assemblies.

ENDEVCO Signal Conditioner Models 6634C, 2777A, 68220 (Computer-Controlled Test-Cell amplifier system) and 68221 (68220 with tracking filter) are recommended for use with this high-impedance accelerometer.

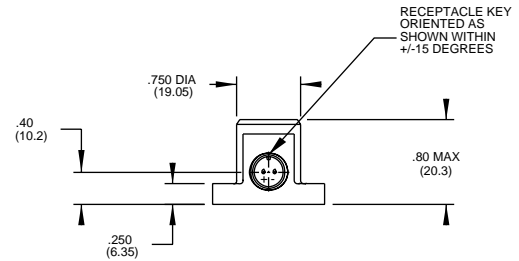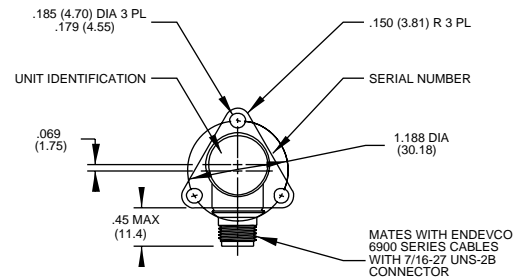


STANDARD TOLERANCE  
 INCHES (MILLIMETERS)  
 .XX = +/- .02 (X = +/- .5)  
 .XXX = +/- .010 (.XX = +/- .25)

TYPICAL AMPLITUDE RESPONSE

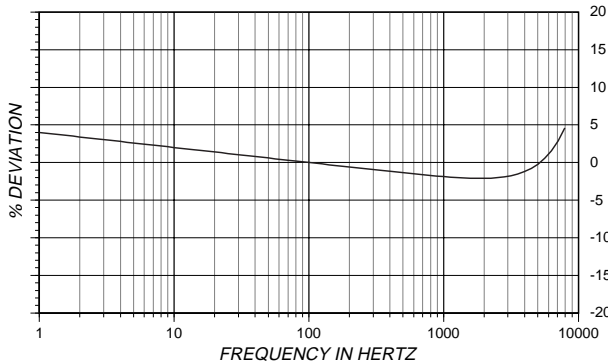

TYPICAL TEMPERATURE RESPONSE

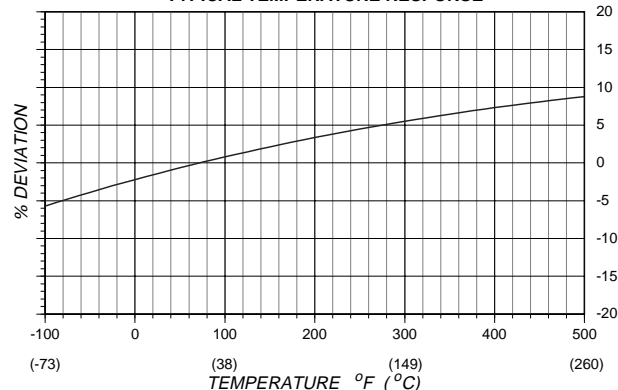

**ENDEVCO  
MODEL  
6222S-20A  
-50A  
-100A**

# Piezoelectric Accelerometer

## SPECIFICATIONS

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C) and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.

DYNAMIC CHARACTERISTICS	Units	-20A	-50A	-100A
CHARGE SENSITIVITY, ±5%	pC/g	20	50	100
FREQUENCY RESPONSE		See Typical Amplitude Response		
RESONANCE FREQUENCY [1]	kHz	45	28	28
AMPLITUDE RESPONSE [2]				
±5%	Hz	1 to 9000	1 to 6000	1 to 6000
±1dB	Hz	1 to 12 000	1 to 9000	1 to 9000
TEMPERATURE RESPONSE		See Typical Curve		
TRANSVERSE SENSITIVITY	%	≤ 3		
AMPLITUDE LINEARITY	%	1/625 g	1/250 g	1/200 g
Up to vibration limit				

## ELECTRICAL CHARACTERISTICS

RESISTANCE (Between pins) [4]	GΩ	≥ 10		
At +500°F (+260°C)	MΩ	≥ 50		
ISOLATION (Pin to case)	GΩ	≥ 10		
At +500°F (+260°C)	MΩ	≥ 50		
CAPACITANCE	pF	2800	2800	12 200
EITHER SIGNAL PIN TO CASE	pF	≤ 30		
UNBALANCE BETWEEN PINS	pF	≤ 2		
GROUNDING		Signal return isolated from case		

## ENVIRONMENTAL CHARACTERISTICS

TEMPERATURE RANGE		-65°F to +500°F (-54°C to +260°C)		
HUMIDITY		Hermetically sealed		
SINUSOIDAL VIBRATION LIMIT	g pk	2000	1000	500
SHOCK LIMIT	g pk	4000	2000	1000
BASE STRAIN SENSITIVITY	equiv. g pk/μstrain	0.004	0.0016	0.0008
THERMAL TRANSIENT SENSITIVITY [4]	equiv. g pk/°F (°C)	0.020 (0.036)	0.010 (0.018)	0.005 (0.009)

## PHYSICAL CHARACTERISTICS

DIMENSIONS		See Outline Drawing		
WEIGHT	gm (oz)	91 (3.2)		
CASE MATERIAL		Stainless Steel		
CONNECTOR [3]		Two pin 7/16-27 UNS receptacle designed to mate with Endevco 6917B, 6917D or equivalent cable assemblies		
MOUNTING TORQUE				
EH621 Cap Screws	lbf-in (Nm)	14 (1.6)		
10-32 Stud	lbf-in (Nm)	18 (2)		

## SUPPLIED CALIBRATION

CHARGE SENSITIVITY				
6222S-20A	%	50 to 9000 Hz		
	dB	9000 Hz through resonance		
6222S-50A/-100A	%	50 to 6000 Hz		
	dB	6000 Hz through resonance		
MAXIMUM TRANSVERSE SENSITIVITY	%			
CAPACITANCE	pF			

## ACCESSORIES

P/N EH621 8-32 UNC x 0.5 inch socket head cap, 3x

### OPTIONAL ACCESSORIES

6917B-XXX	CABLE ASSEMBLY (500°F)
6917D-XXX	CABLE ASSEMBLY (550°F)
2981-12	10-32 MOUNTING STUD

## NOTES

- Cover resonance at approximately 23 kHz, case resonance at approximately 35 kHz.
- Low-end amplitude response is a function of the associated electronics.
- M83723/95K0803N or D38999/26KA983N connector plug or equivalent also available as a standard option. Specify at time of order.
- Prolonged exposure at maximum temperature may decrease the return to room temperature resistance to as low as 500 MΩ, but will not degrade the overall performance of the unit. All units are

- processed to initially meet 10 GΩ at room temperature. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 800-982-6732 for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.



Model 6634C

Continued product improvement necessitates that Endevco reserve the right to modify these specifications without notice. Endevco maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability.

ENDEVCO CORPORATION, 30700 RANCHO VIEJO ROAD, SAN JUAN CAPISTRANO, CA 92675 USA (800) 982-6732 (949) 493-8181 fax (949) 661-7231

[www.sensorway.cn](http://www.sensorway.cn)

Email: [applications@endevco.com](mailto:applications@endevco.com)

0802 REV A